




德玛克控股集团
DEMARK HOLDING GROUP



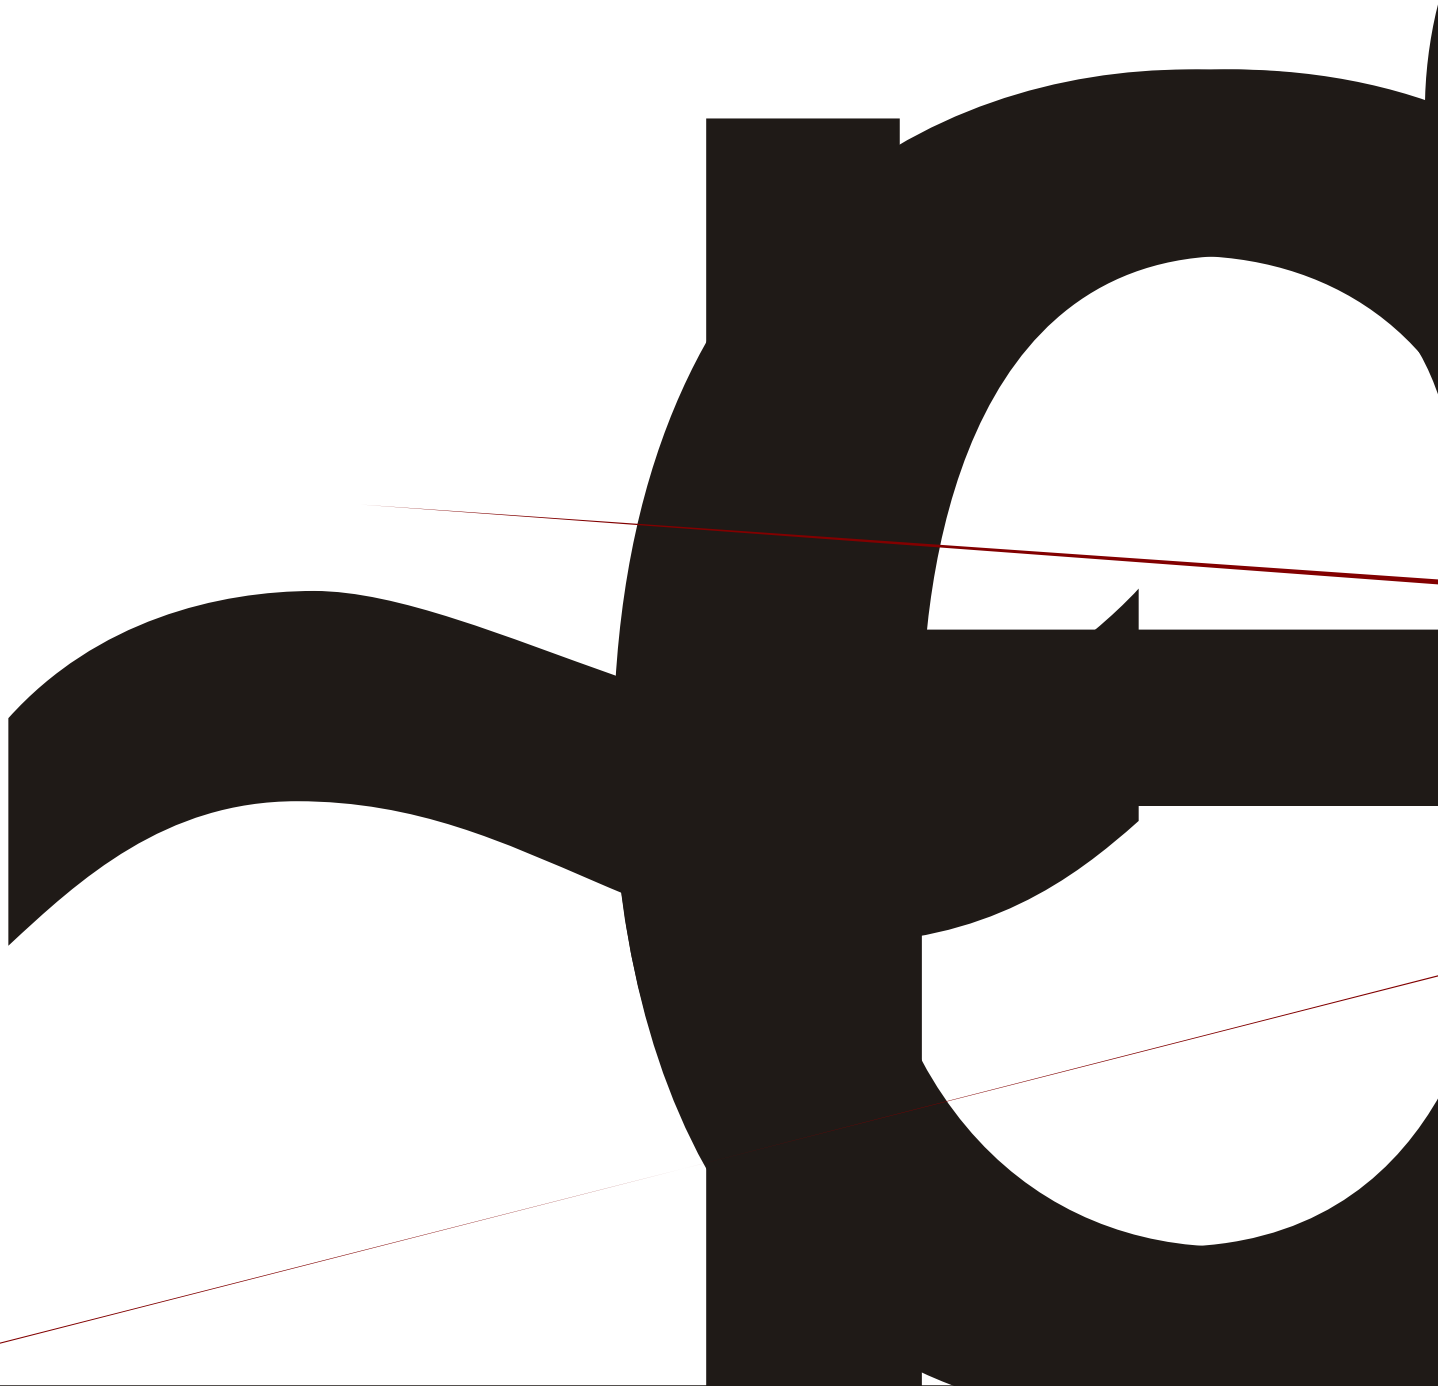

Electric screw drive

Independent electric screw drive brings you both plasticization and energy efficiency.

Pressure hold valve


With the advanced pressure hold technology, the system makes the plasticization and pressure hold at the same time therefore has a better cycle time for production.

Reliable clamping

Yem R55

Special design for PET preform mold, which ensure the fast clamping movement and uniformly forced of the mold.


Proportional valve control

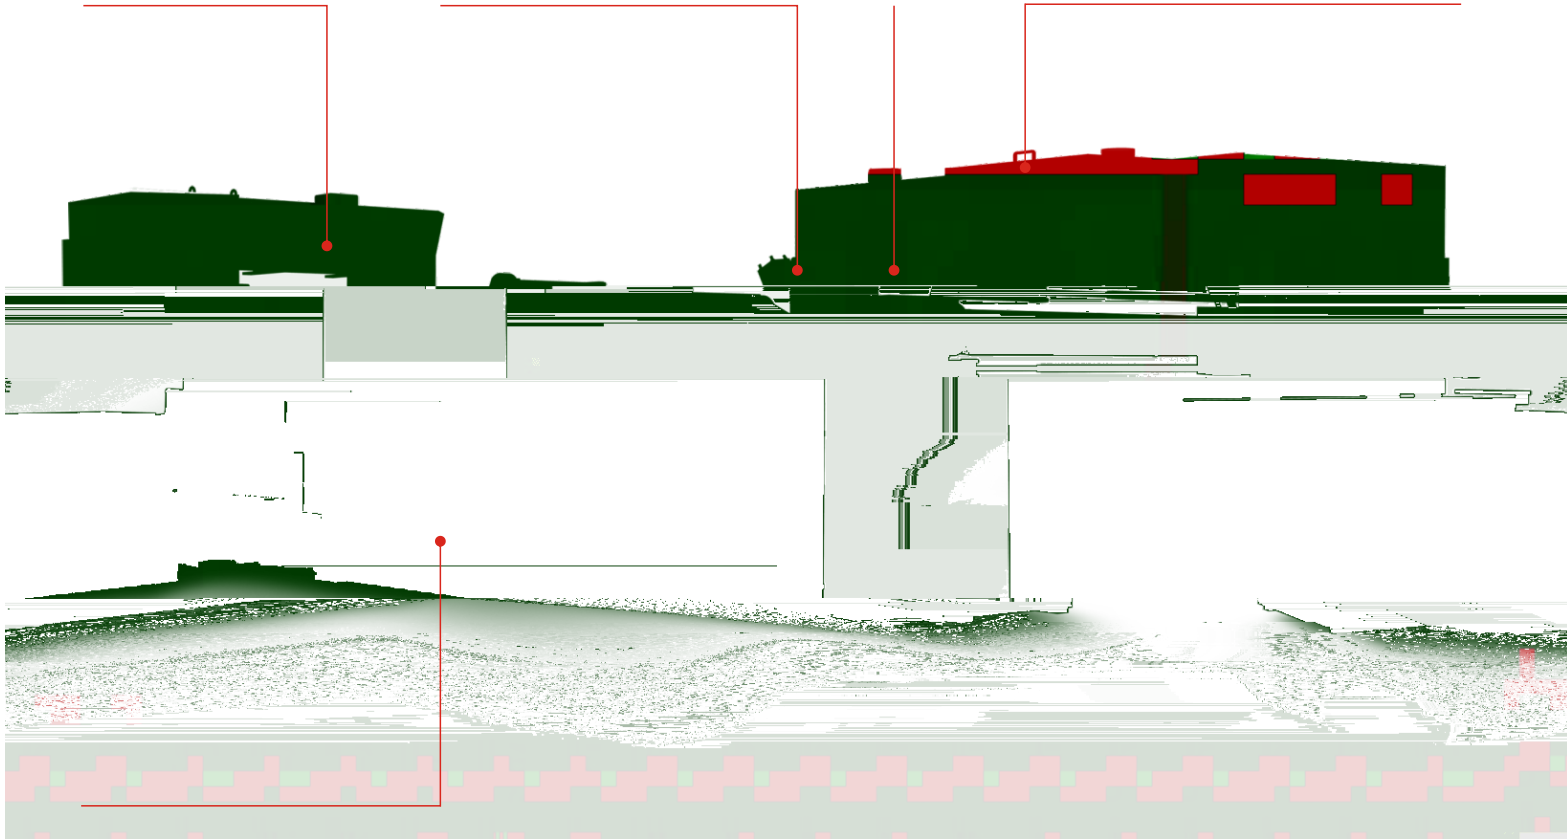

Servo motor drive hydraulic system

The hydraulic system was driven by a servo motor which ensure the lower energy consumption and sufficient hydraulic power supply.

西门子控制系统 SIEMENS control system

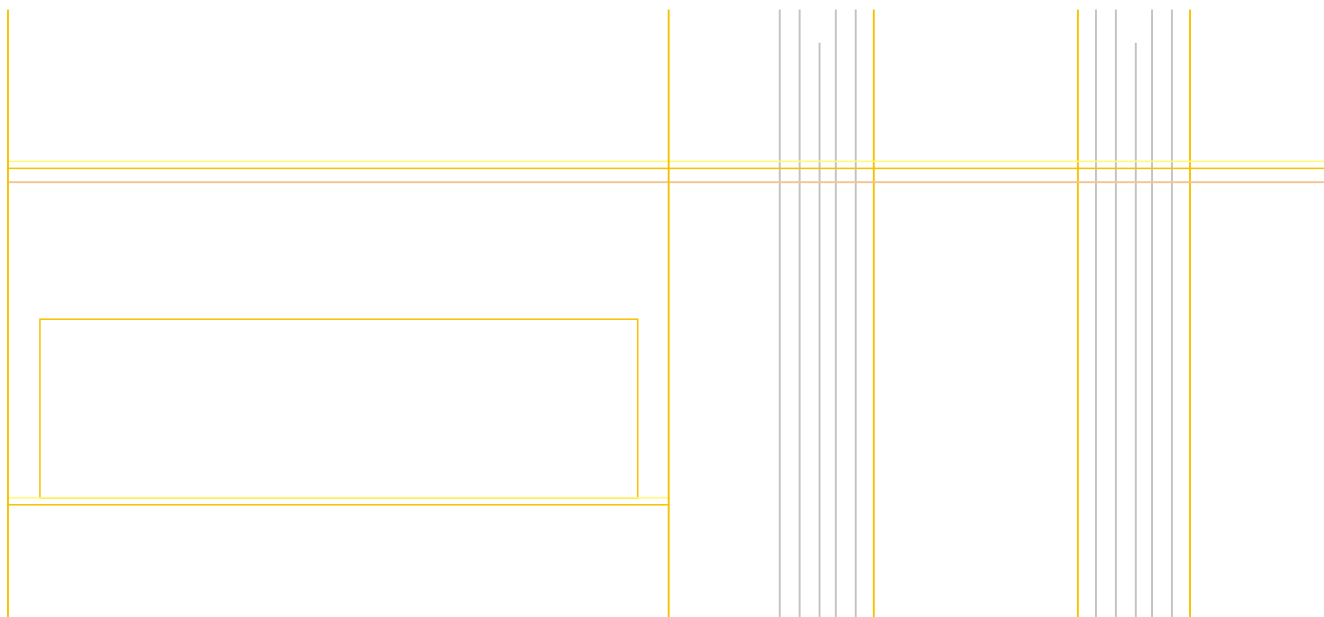

ECO300/3500

				25
			90	100
			2500	3500
			110	150
			300	300
			585	585
		80	300-720	300-720
		570	660x760	660x760
		150	180	180
		8	20	20
		9	9	9
		32	48	72
Capacity Of Non-cutting PET Preform Mold				
		45	39+55	39+55
		12	12	36
		43	51	63
		30	30	55
		96	96	216
		32x3	32x3	48x3
		257x160x220	270x160x220	280x160x250
		380/50	380/50	380/50
		169	187	226
		5-11	5-11	5-12
		0.8	0.8	0.8
		700	700	900
		25	25	25
		0.3	0.3	0.3
		100	100	120
		0.7-0.9	0.7-0.9	0.7-0.9
		400	400	800
		840x160x240	860x160x240	880x170x250
		14	14	17
				18

Machine Size(LxWxH)

